

Architectural Poles

OptoLed
Saving Energy



Vulcano

Mechanical Details

- Galvanized steel or aluminium profile body
- Stainless steel screws
- In compliance with European Standards EN-60598
- Mechanical impact resistance IK 08
- Protection Grade IP66
- Electrical installation Class I
- Electrostatic polyester powder coating with high thermal conductivity


Electrical Details

- DC forward current : 700mA
- PMMA Optical Lens Efficiency : >88%
- PCB Heat Conductivity : >1.2W/mK
- Input Voltage : 230VAC
- Frequency Range : 47 ~ 63Hz
- Power Factor : >0.9
- Total Harmonic Distortion(THD) : <15%
- Color Temperature : 3000-6500 (K)
- Color Rendering Index : >70
- Temperature of Working Condition : - 40C to + 55C
- Humidity of Working Condition : 10% ~ 90%
- Led Efficiency (Typ.) : 105-120 (lm/W)
- Working Life : >50,000Hrs
- Protection Grade : IP66

Specification

| Code | Watt | Lamp | Current | 3000K (lm) | 4000K (lm) | 6000K (lm) |
|-------------|------|-------|---------|-----------------------|-----------------------|-----------------------|
| Vulcano 27W | 27W | XP-G2 | 700mA | 2911 lm. 109 lm/W. | 3099 lm. 116 lm/W. | 3267 lm. 123 lm/W. |
| Vulcano 40W | 40W | XP-G3 | 1050mA | 4360 lm. 109 lm/W. | 4640 lm. 116 lm/W. | 4920 lm. 123 lm/W. |
| Vulcano 54W | 54W | XP-L | 1400mA | 6102 lm. 113 lm/W. | 6588 lm. 122 lm/W. | 7074 lm. 131 lm/W. |
| Vulcano 54W | 54W | XHP35 | 350mA | 6102 lm. 113 lm/W. | 6588 lm. 122 lm/W. | 7074 lm. 131 lm/W. |

Technical Detail



Anchorage



Flange Cover


Standards



Vulcano

Optical Details


- CS12862_STRADA-IP-2X6-DWC
- Short IESNA Type II beam for narrow roads or high poles with extremely low glare. Optimized for CREE XM-L.



Opto Lego LED Modul



Optoled IP 67
 Sigorta / Fuse
 W:84 x L:65 x H197 mm

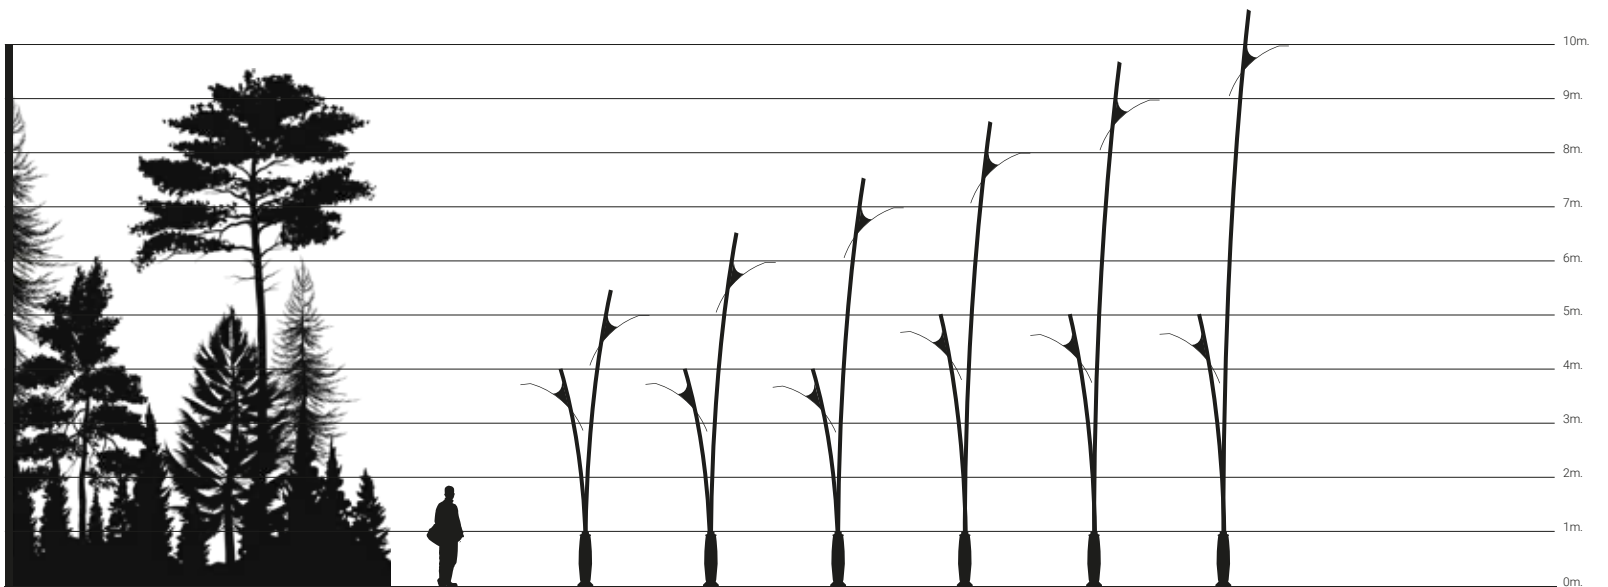





Vulcano